

RIVERBANK ACOUSTICAL LABORATORIES

1512 S. BATAVIA AVENUE
GENEVA, ILLINOIS 60134

Alion Science and Technology

630/232-0104
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

TEST REPORT

FOR: Skyfold  

Sound Transmission Loss Test
RAL™-TL01-281a

ON: Skyfold Autolift Wall System, 11.75 Inches

Page 1 of 4

CONDUCTED: 13 November 2001

TEST METHOD

Unless otherwise designated, the measurements reported below were made with all facilities and procedures in conformity with the ISO Designations ISO 140-3, Part 3 and ISO 717-1.2, as well as other pertinent standards. The test was conducted for Mr. Mark McDonald of Skyfold, 325 Lee Ave., Baie d'Urfe, Quebec, Canada H9X 3S3.

DESCRIPTION OF THE SPECIMEN

The test specimen was designated by the manufacturer as Skyfold Autolift Wall System, 11.75 inches. The overall dimensions of the specimen as measured were 4.27 m (168 in.) wide by 2.63 m (103.5 in.) high and 298 mm (11.75 in.) thick. The specimen was installed by the manufacturer directly into a 2.74 m (9 ft) by 4.27 m (14 ft) wood-lined steel frame.

A description of the specimen was as follows: The wall consisted of five panels on each side of a 184 mm (7.25 in.) airspace. The space between the vertical planes of panels contained two pantograph type lifting mechanisms and a T-bar. The wall folded and raised vertically to the top of the test opening. The lifting action was provided by use of an electric motor attached by cable to the T-bar. Average weight of the panels was 32.6 kg (71.9 lbs) each. Nominal dimensions of the panels were 4.24 m (166.75 in.) long by 559 mm (22 in.) high by 57 mm (2.25 in.) thick. Each panel consisted of a 0.8 mm (0.032 in.) galvanized steel face sheet, a 19 mm (0.75 in.) honeycomb paper fill core, and a 0.5 mm (0.018 in.) galvanized steel backer sheet. Attached to the interior face of each panel was 38 mm (1.5 in.) thick semi-rigid glass fiber (identified as Manson AKI board, density 28.8 kg/m³ (5.9 lbs/ft³)). The panels were hinged at two locations each. In the closed position, there was 13 mm (0.5 in.) overlap between the panels. The panel joints were sealed with 13 mm (0.5 in.) by 6 mm (0.25 in.) expanded cross-linked polyethylene foam. The panels were sealed to the test frame around the vertical perimeter using 3 mm (0.125 in.) thick rubber bulb seals which measured nominally 19 mm (0.75 in.) in the closed position. The panels were sealed to the test frame around the top and bottom perimeter using 2 mm (0.08 in.) thick rubber bulb seals which measured nominally 38 mm (1.5 in.) at the top and 35 mm (1.375 in.) at the bottom in the closed position. Laboratory personnel performed a full inspection on the test specimen. Prior to testing the operable wall was opened and closed at least five times, and the test was conducted with no further adjustments.

This report shall not be reproduced except in full, without the written approval of RAL.

THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



NVLAP Lab Code 100227-0

ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

RIVERBANK ACOUSTICAL LABORATORIES

1512 S. BATAVIA AVENUE
GENEVA, ILLINOIS 60134

Alion Science and Technology

630/232-0104
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

TEST REPORT

Skyfold  **SKYFOLD**[®]  **SKYFOLD**
classic 51[™] *zenith*^{® 51}

RAL[™]-TL01-281a

13 November 2001

Page 2 of 4

The weight of the specimen as measured was 470 kg (1,037 lbs.), an average of 42 kg/m² (8.6 lbs/ft²). The transmission area used in the calculations was 11.2 m² (121 ft²). The source and receiving room temperatures at the time of the test were 23±2°C (73±2°F) and 59±1% relative humidity. The source and receive reverberation room volumes were 179m³ (6,298 ft³) and 177 m³ (6,255 ft³), respectively.

This report shall not be reproduced except in full, without the written approval of RAL.

THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



NVLAP Lab Code 100227-0

ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

RIVERBANK ACOUSTICAL LABORATORIES

1512 S. BATAVIA AVENUE
GENEVA, ILLINOIS 60134

Alion Science and Technology

630/232-0104
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

TEST REPORT

Skyfold  **SKYFOLD**[®]  **SKYFOLD**
classic 51[™] *zenith*[®] 51

RAL[™]-TL01-281a

13 November 2001

Page 3 of 4

TEST RESULTS

Sound reduction index values (R) as reported below are tabulated at the sixteen standard frequencies. A graphic presentation of the data and additional information appear on the following page. The precision of the R values are within the limits set by the ISO 140-3, part 3.

<u>FREQ.</u>	<u>R</u>	<u>DEV.</u>	<u>FREQ.</u>	<u>R</u>	<u>DEV.</u>
100	32	0	630	45	7
125	34	1	800	49	4
160	37	1	1000	52	2
200	41	0	1250	57	0
250	44	0	1600	61	0
315	47	0	2000	61	0
400	47	3	2500	62	0
500	45	6	3150	61	0

R_w = 51
Total Dev. 24


ABBREVIATION INDEX

FREQ. = Frequency, Hertz, (cps)
R = Sound Reduction Index, dB
DEV. = Deviations, dB < Spectrum Adaptation Contour
R_w = Weighted Sound Reduction Index

Tested by


Marc Sciaky
Experimentalist

Approved by


Dean Victor
Senior Experimentalist

This report shall not be reproduced except in full, without the written approval of RAL.

THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.




NVLAP Lab Code 100227-0

ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

TEST REPORT

**SOUND REDUCTION INDEX
REPORT
RAL-TL01-281a**

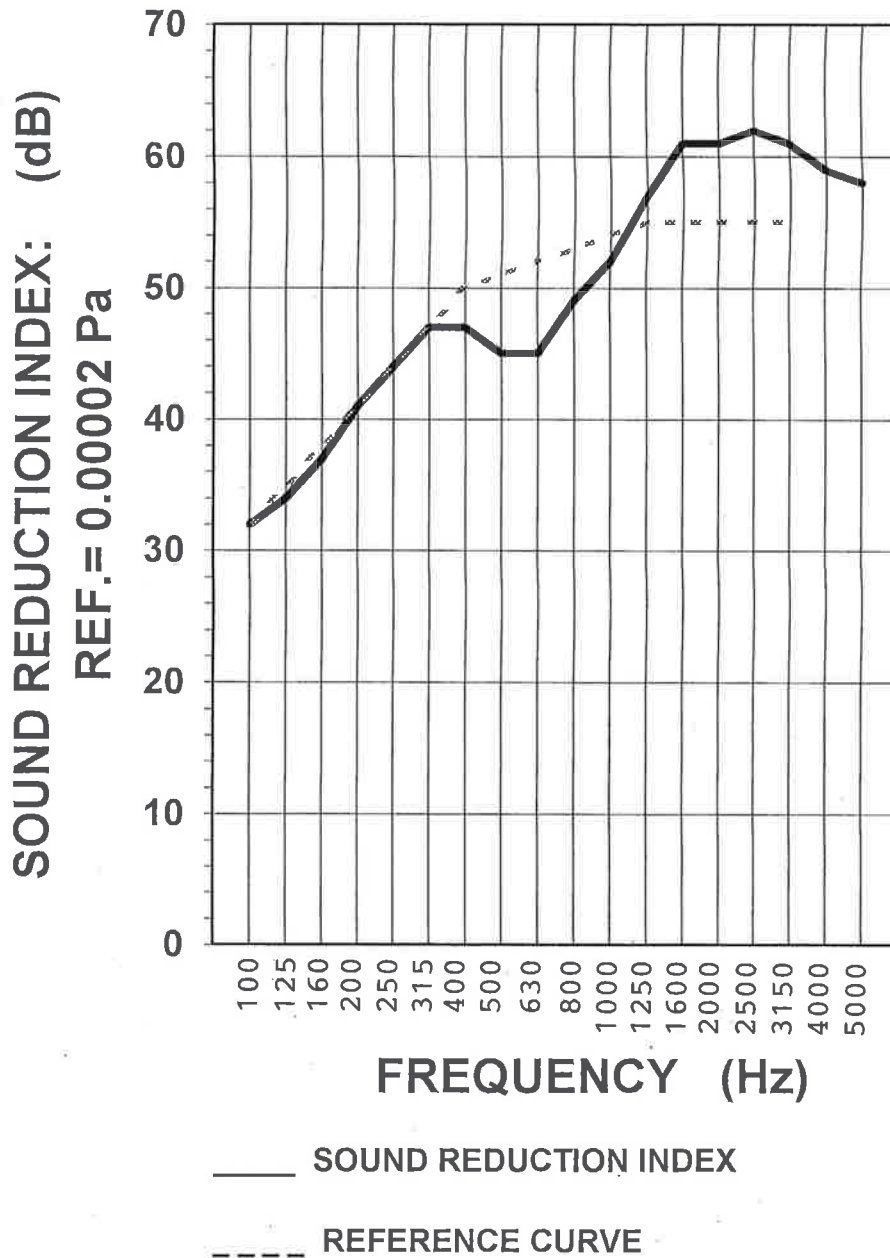

This report shall not be reproduced except in full, without the written approval of RAL.

THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.

