



# Classic™ Premium



The Acoustic Leader in Vertically Folding Retractable Walls


# Classic™ Premium

Designed to solve acoustic challenges in complex architectural spaces, with sleek ceiling closure panels for a seamless finish.


The main difference between the Classic Series and Classic Premium is the latter's built-in closure panels, which hide the ceiling pocket for a seamless look. When lowered, Classic Premium acts as a fixed wall, appearing as a permanent architectural element.

## ADVANTAGES

- Retracts into the ceiling to maximize floor space
- Maximum sound isolation (STC 60 / RW 59)
- Width: Unlimited
- Height: Maximum height 34 feet (10.360m)
- No floor, wall tracks or visible hinges
- Fully automatic
- Digital keypad operation (included)
- Quiet operation
- Lightweight panels
- Flat and rigid
- Cost-effective and lightweight structure
- Variety of finish options
- Can be used in stepped or sloped spaces
- Equipped with a safety obstruction sensor
- Variety of finish options

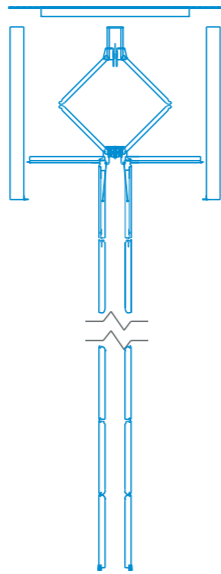

# Classic™ Premium

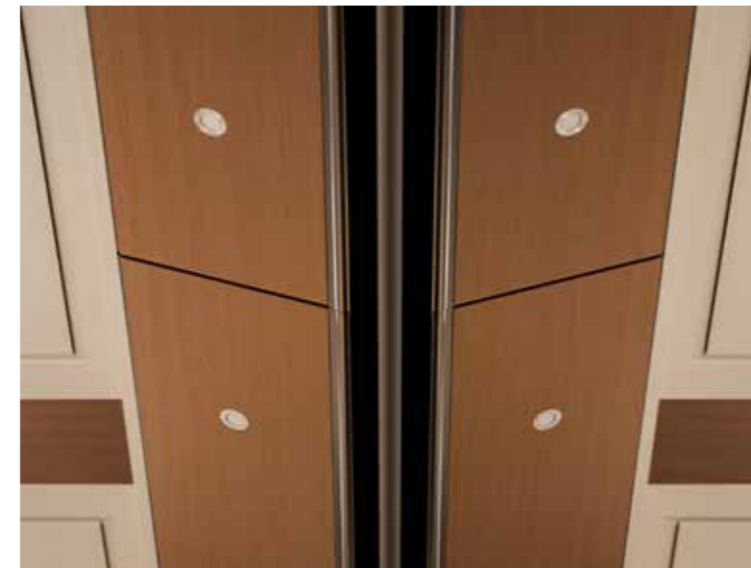

**CLASSIC PREMIUM SERIES**

**IMPERIAL**

DIMS FOR STANDARD DRIVE SYSTEM - PANELS ≤ 26.5625"

FINISHED CEILING "A"	BEAM HEIGHT "B"	POCKET WIDTH "C"	PANEL HEIGHT "D"	NUMBER OF PANELS HIGH	WALL THICKNESS	TOP SEAL (FIXED N/A)	FLOOR SEAL	MAX PANEL LENGTH			
								CLASSIC 51	CLASSIC NR	CLASSIC 55	CLASSIC 60
14' - 1"	17' - 1.5"	60.125	23.3125	"7 High + 1 Horizontal"	11 3/4"	0.875	2	12'	12'	12'	12'
14' - 6"	17' - 6.75"	61.625	24.0625								
15' - 0"	18' - 0.5"	63.25	24.875								
15' - 6"	18' - 6.75"	65	25.75								
15' - 11"	19' - 0"	66.5	26.5								
16' - 0"	19' - 6.5"	60.25	23.375	"8 High + 1 Horizontal"	11 3/4"	0.875	2	12'	12'	12'	12'
16' - 6"	20' - 0.5"	61.75	24.125								
17' - 0"	20' - 6.5"	63.25	24.875								
17' - 6"	21' - 0.5"	64.75	25.625								
18' - 0"	21' - 6.5"	66.25	26.375								
18' - 1"	21' - 7.5"	66.5	26.5								
18' - 2"	21' - 8.375"	60.5	23.5	"9 High + 1 Horizontal"	11 3/4"	0.875	2	12'	12'	12'	12'
18' - 6"	22' - 0.25"	61.375	23.9375								
19' - 0"	22' - 6.5"	62.75	24.625								
19' - 6"	23' - 0.25"	64	25.25								
20' - 0"	23' - 6.25"	65.375	25.9375								
20' - 5"	23' - 11.5"	66.5	26.5								
20' - 6"	24' - 5.75"	61.5	24	"10 High + 1 Horizontal"	11 3/4"	0.875	2	12'	12'	12'	10'
21' - 0"	24' - 11.625"	62.625	24.5625								
21' - 6"	25' - 5.75"	63.875	25.1875								
22' - 0"	26' - 0"	65.125	25.8125								
22' - 6"	26' - 5.625"	66.25	26.375								
22' - 7"	26' - 7"	66.5	26.5								
22' - 8"	26' - 8"	61.625	24.0625	"11 High + 1 Horizontal"	11 3/4"	0.875	2	12'	12'	12'	8'
23' - 0"	26' - 11.5"	62.25	24.375								
23' - 6"	27' - 5.75"	63.375	24.9375								
24' - 0"	28' - 0"	64.5	25.5								
24' - 6"	28' - 6.125"	65.625	26.0625								
24' - 11"	28' - 11"	66.5	26.5								
25' - 0"	29' - 5.75"	62.375	24.4375	"12 High + 1 Horizontal"	11 3/4"	0.875	2	12'	10'	10'	8'
25' - 6"	29' - 11.75"	63.375	24.9375								
26' - 0"	30' - 5.75"	64.375	25.4375								
26' - 6"	30' - 11.75"	65.375	25.9375								
27' - 0"	31' - 5.75"	66.375	26.4375								
27' - 1"	31' - 6.5"	66.5	26.5								
27' - 2"	31' - 7.5"	62.375	24.4375	"13 High + 1 Horizontal"	11 3/4"	0.875	2	10'	10'	10'	8'
27' - 6"	31' - 11.75"	63	24.75								
28' - 0"	32' - 5.5"	63.875	25.1875								
28' - 6"	32' - 11"	64.75	25.625								
29' - 0"	33' - 5.5"	65.75	26.125								
29' - 5"	33' - 10.5"	66.5	26.5								
29' - 6"	34' - 4.625"	62.875	24.6875	"14 High + 1 Horizontal"	11 3/4"	0.875	2	10'	8'	8'	8'
30' - 0"	34' - 10.625"	63.75	25.125								
30' - 6"	35' - 4.875"	64.625	25.5625								
31' - 0"	35' - 10.875"	65.5	26								
31' - 6"	36' - 5.125"	66.375	26.4375								
31' - 7"	36' - 5.875"	66.5	26.5								
31' - 8"	36' - 6.75"	62.875	24.6875	"15 High + 1 Horizontal"	11 3/4"	0.875	2	10'	8'	8'	8'
32' - 0"	36' - 11.5"	63.5	25								
32' - 6"	37' - 5"	64.25	25.375								
33' - 0"	37' - 10.75"	65	25.75								
33' - 6"	38' - 5.25"	65.875	26.1875								
33' - 11"	38' - 10"	66.5	26.5								
34' - 0"	38' - 11"	66.6250	26.5625								


\* Beam heights indicated may vary with wall size and motor size. This table is not for construction purposes. Refer to shop drawings for final build to dimensions

**METRIC**

DIMS FOR STANDARD DRIVE SYSTEM - PANELS ≤ 675mm

FINISHED CEILING "A"	BEAM HEIGHT "B"	POCKET WIDTH "C"	PANEL HEIGHT "D"	NUMBER OF PANELS HIGH	WALL THICKNESS	TOP SEAL (FIXED N/A)	FLOOR SEAL	MAX PANEL LENGTH			
								CLASSIC 51	CLASSIC NR	CLASSIC 55	CLASSIC 60
4295	5235	1530	593.73	"7 High + 1 Horizontal"	300	22.2	50.8	3655	3655	3655	3655
4350	5290	1545	601.66								
4400	5335	1560	608.01								
4550	5490	1605	630.24								
4700	5630	1645	650.88								
4850	5790	1690	673.10								
4960	6030	1550	603.25	"8 High + 1 Horizontal"	300	22.2	50.8	3655	3655	3655	3655
4900	5980	1535	596.90								
5000	6070	1560	608.01								
5150	6220	1595	627.06								
5300	6370	1635	646.11								
5450	6525	1675	665.16								
5500	6575	1685	671.51								
5520	6590	1690	673.10								
5550	6630	1540	598.49	"9 High + 1 Horizontal"	300	22.2	50.8	3655	3655	3655	3050
5600	6670	1550	603.25								
5750	6830	1585	620.71								
5900	6970	1615	636.59								
6050	7130	1650	654.05								
6200	7270	1685	669.93								
6230	7300	1690	673.10								
6240	7450	1560	608.01	"10 High + 1 Horizontal"	300	22.2	50.8	3655	3655	3655	2440
6350	7560	1580	619.13								
6500	7720	1615	635.00								
6650	7860	1640	649.29								
6800	8020	1675	665.16								
6890	8100	1690	673.10								
6900	8110	1560	609.60	"11 High + 1 Horizontal"	300	22.2	50.8	3655	3050	3050	2440
7100	8320	1600	628.65								
7250	8460	1625	641.35								
7400	8620	1655	655.64								
7550	8760	1680	668.34								
7600	8810	1690	673.10								
7610	8965	1580	619.13	"12 High + 1 Horizontal"	300	22.2	50.8	3050	3050	3050	2440
7700	9060	1595	627.06								
7850	9210	1620	639.76								
8000	9365	1650	652.46								
8150	9495	1670	663.58								
8260	9610	1690	673.10								
8270	9620	1580	619.13	"13 High + 1 Horizontal"	300	22.2	50.8	3050	2440	2440	2440
8450	9805	1610	633.41								
8600	9950	1630	644.53								
8750	10115	1655	657.23								
8900	10260	1680	668.34								
8975	10320	1690	673.10								
8980	10480	1595	627.06	"14 High + 1 Horizontal"	300	22.2	50.8	3050	2440	2440	N/A
9150	10655	1620	639.76								
9300	10790	1640	649.29								
9450	10945	1665	660.40								
9600	11100	1685	671.51								
9635	11120	1690	673.10								
9640	11145	1595	627.06	"15 High + 1 Horizontal"	300	22.2	50.8	2440	2440	2440	N/A
9800	11310	1620	638.18								
9950	11450	1640	647.70								
10100	11595	1655	657.23								
10250	11740	1675	666.75								
10360	11860	1690	674.69								

\* Beam heights indicated may vary with wall size and motor size. This table is not for construction purposes. Refer to shop drawings for final build to dimensions

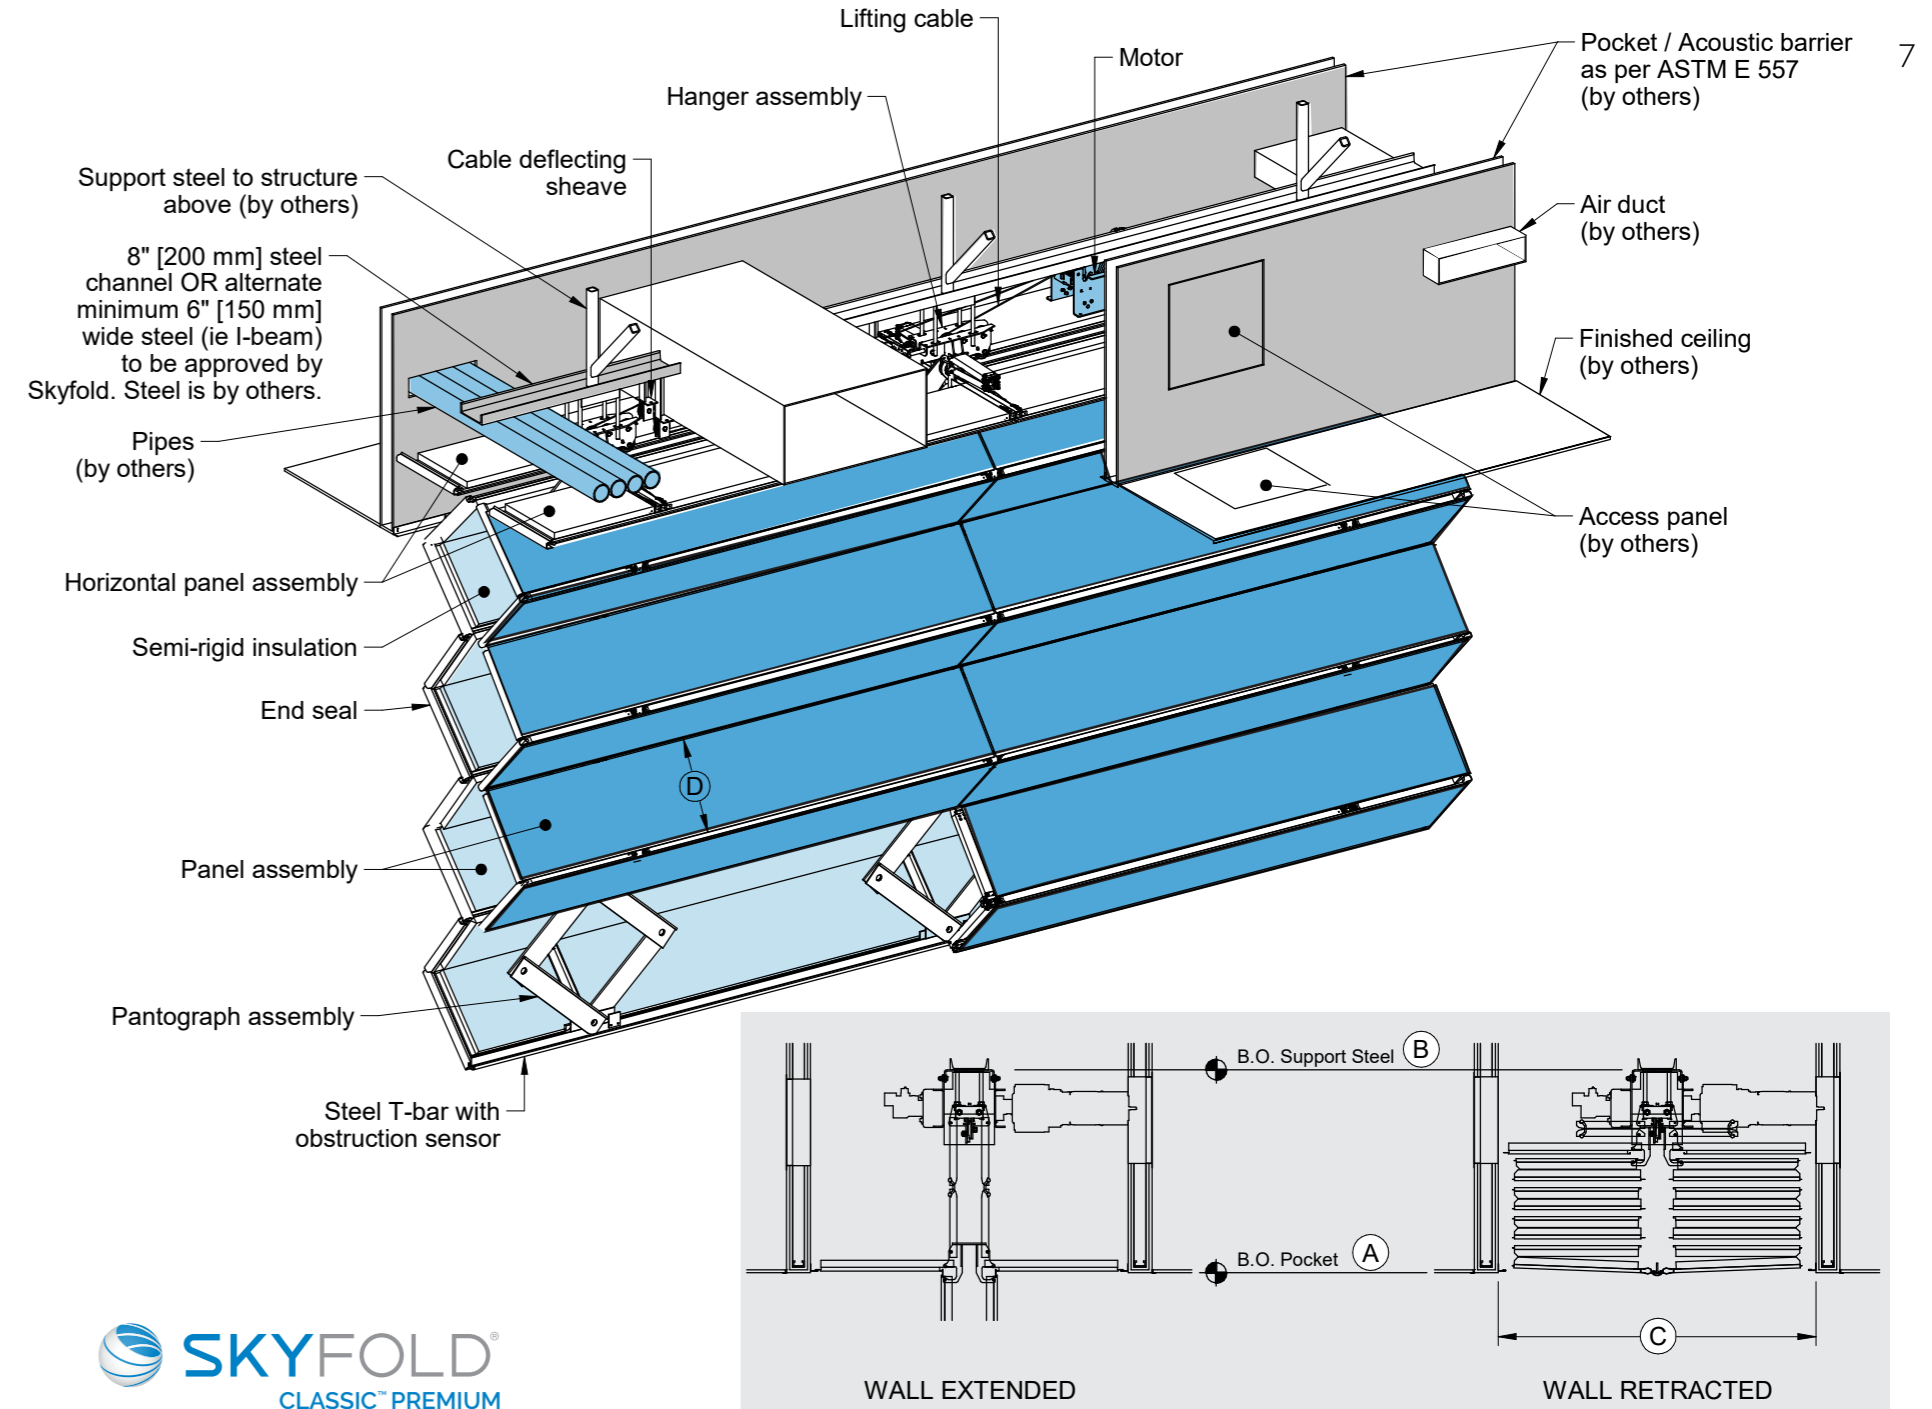



For more information visit our website or contact us directly.

**MAIN OFFICE**

325 Lee Avenue  
Montreal, Quebec  
CANADA H9X 3S3

T +1 (514) 457-4767  
F +1 (514) 457-7111  
info@skyfold.com  
**www.skyfold.com**



E01/2026

Recycled materials: Up to 97%  
Post-consumer: Up to 27%  
Pre-consumer: Up to 51%

SKYFOLD®, SKYFOLD® Classic™, SKYFOLD Zenith® and SKYFOLD Mirage® are registered trademarks of Skyfold Inc. and Skyfold Investments Ltd.

Skyfold is pleased to be an official member of the U.S. Green Building Council. The Green Council is committed to promoting better designed buildings that are not only more environmentally and socially responsible, but also help improve the quality of life for those who occupy them and the communities in which they are built. The Council has developed a benchmarking system known as LEED (Leadership in Energy & Environmental Design). When it comes to recycled materials, architects and owners who choose a Skyfold vertically folding operable wall system can calculate the following toward LEED accreditation on their projects. In order to continue protecting our environment, it is essential that we all do our part by using recycled materials whenever possible. Skyfold is proud to help.